


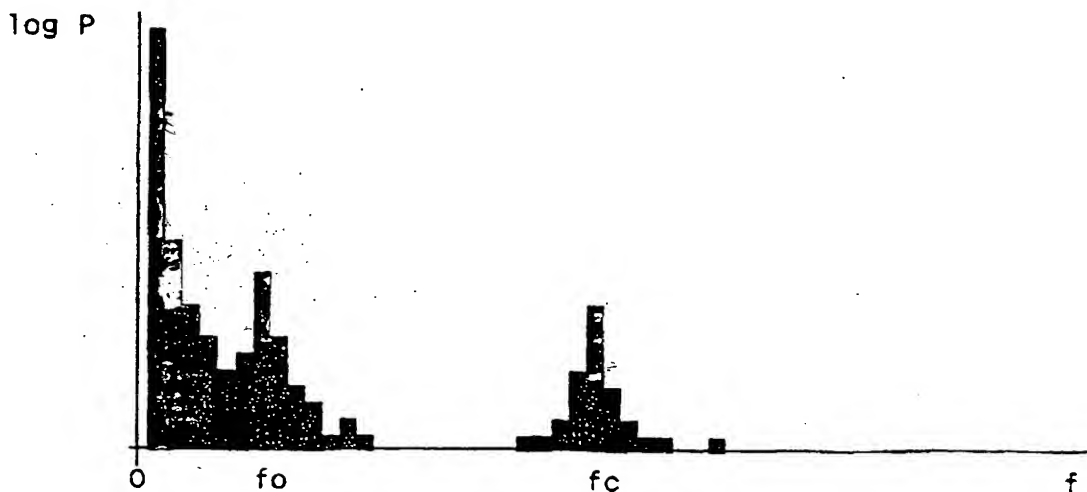

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F03D 7/04, 11/00	A1	(11) International Publication Number: WO 99/36695 (43) International Publication Date: 22 July 1999 (22.07.99)
(21) International Application Number: PCT/DK99/00020 (22) International Filing Date: 14 January 1999 (14.01.99) (30) Priority Data: 0046/98 14 January 1998 (14.01.98) DK (71) Applicant (for all designated States except US): DANCON- TROL ENGINEERING A/S [DK/DK]; Italiensvej 3, DK-8450 Hammel (DK). (72) Inventor; and (75) Inventor/Applicant (for US only): GARNAES, Svend [DK/DK]; Klampenborgvej 3, DK-5700 Svendborg (DK). (74) Agent: PLOUGMANN, VINGTOFT & PARTNERS A/S; Sankt Annæ Plads 11, P.O. Box 3007, DK-1021 Copen- hagen K (DK).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i> <i>In English translation (filed in Danish).</i>

(54) Title: METHOD FOR MEASURING AND CONTROLLING OSCILLATIONS IN A WIND TURBINE

**(57) Abstract**

The invention relates to a method for measuring and controlling oscillations in a wind turbine wherein the wind turbine control system is adapted by means of spectrum analysis, to determine the existence and amplitude of vibrations of the wind turbine rotor blades and/or other structural vibrations on the basis of existing sensor/transducer signals relating to the characteristics of the electrical power output. The control system of the wind turbine is adapted to attenuate the oscillations before they reach an unacceptable level, and thereafter to cause the wind turbine to resume normal operation.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD FOR MEASURING AND CONTROLLING OSCILLATIONS IN A WIND TURBINE

The present invention relates to a method for measuring and controlling oscillations in a wind turbine coupled directly to a power mains, voltage and/or current being measured at the mains connection and other values being optionally derived therefrom, such as apparent power, real power, reactive power, power factor, and $\cos(\varphi)$.

The development of wind turbines leads to increasingly bigger turbines with increasing hub heights and rotor diameters. This creates a number of mechanical difficulties caused by the correspondingly lower natural resonance frequencies and attenuations of the structures used.

Furthermore, certain rotor blades in common use show a tendency to form a complex pattern of rotor blade oscillations of great amplitude under certain meteorological conditions. This exposes the rotor blades to unacceptable dynamic loads reducing their time of life and endangering the wind turbine safety.

It is essential for the structural safety of the wind turbine and thus also for human safety to be able to detect both oscillations of the wind turbine rotor blades and other structural oscillations of the wind turbine and to be able to stop these oscillations, e.g. by a temporary wind turbine standstill or in any other way.

A general wind turbine standstill under meteorological conditions that appear to facilitate the oscillation phenomena is not a practicable solution as it would be detrimental to the annual output of the wind turbine. It is therefore desirable to be capable of detecting the presence or absence of the oscillation phenomena and to be capable of adjusting the wind turbine control means so as to stop any occurring oscillation phenomenon so that the wind turbine may resume normal operation once the oscillation phenomenon has ceased.

Certainly all wind turbines have been provided with a device capable of detecting heavy oscillations and bringing the turbine to a standstill by interacting with the wind turbine emergency stop circuit. However, this device is primarily designed to ensure stopping the wind turbine in case of a sudden rotor unbalance such as by loss of a

blade tip or in case of structural damage to the rotor following a lightning stroke. This prior art device cannot detect rotor blade oscillations or tower oscillations until they have reached an amplitude which presents an immediate danger to the wind turbine.

Further, in the case of rotor blade oscillations even if the oscillation phenomenon of a single blade reaches a harmful amplitude, the resulting vibration level as measured e.g. at the wind turbine nacelle is relatively modest as the phenomenon generally comprises oscillations in opposite phase on two out of three rotor blades. Therefore such a device is not suitable for detecting such a harmful situation.

10 Further, this prior art device is generally incapable of making the wind turbine resume normal operation once the oscillations have ceased, since the device is incorporated as a part of the emergency stop circuit of the wind turbine.

Finally, self-contained vibration guards are known that may be incorporated in wind turbines. These guards permit detecting the presence of e.g. oscillations at a modest amplitude so that the dynamic load on the rotor blades can be kept within acceptable limits provided that the turbine can be stopped at the command of the vibration guard. However, these self-contained units are normally also incorporated in the emergency stop circuit of the wind turbine and thus also cannot bring the wind turbine into normal operation once the oscillations have ceased.

For the purpose of wind turbine approval, it is also desirable that detection and countermeasures against oscillation phenomena are effected at a modest oscillation amplitude by the wind turbine control system itself not depending upon external devices.

It is an object of the present invention to provide a method for detecting on the basis of existing measurement signals the existence of wind turbine oscillations and for attenuating these oscillations by means of the wind turbine control system.

This object is achieved by a method of the type mentioned initially, in which a spectrum analysis is performed of one or more of the measured values or any values derived therefrom, and wind turbine oscillation amplitudes are determined on the basis of the result of the spectrum analysis, and when the determined amplitude exceeds a

certain value, countermeasures are taken by the wind turbine control system to reduce the amplitude of the oscillations.

5 This permits detection of even minor vibrations or oscillations without incorporation of external devices in the wind turbine by exploitation of the fact that the vibrations or oscillations lead to variations in the electrical measurements already being made on the wind turbine or values derived therefrom, and permits using the result of the detection to attenuate the detected vibrations or oscillations by means of the wind turbine control system.

10

The dependent claims define appropriate embodiments of the method according to the invention. Particularly the dependent claims 4-10 define appropriate methods of counteracting for reducing the amplitude of the detected oscillations relating to the particular type of control system provided in a wind turbine.

15

The invention will be further explained in the following referring to Fig. 1 which illustrates a spectrum analysis of a recorded measurement of a wind turbine.

20 A wind turbine control system is always adapted to make a number of measurements at the mains connection of the turbine. The measurements are made partly for operational reasons and partly for datalogging and statistics relating to the operation of the wind turbine. For that purpose the wind turbine control system is provided with a number of transducers for measuring voltage and current of the phases of the mains connection. Based on these primary measurements of voltage and current, the control
25 system can calculate further secondary mains data, e.g. apparent power, real power, reactive power, power factor or $\cos(\varphi)$.

Rotor blade oscillations lead to vibrations in the nacelle and rotor shaft of the wind turbine. Also in case of oscillations in opposite phase on two out of three rotor blades,
30 vibrations can be measured in the nacelle and this may be caused by an asymmetry (a non-linear elasticity) caused by the oscillation amplitude involved. Thus the rotor shaft torque will also comprise a component generated by rotor oscillations.

Since the rotor blade oscillations generate a component in the torque of the rotor shaft, such component will also appear in the generator shaft torque and in a wind turbine with a generator coupled directly to the mains. It will therefore also appear in the primary measurements of current and/or voltage and in all the secondary mains data derived from the primary measurement values.

According to the invention, the wind turbine control system performs a spectrum analysis of one or more of these sets of data and an averaging of a number of spectra. Thereby the fluctuations of the generator shaft torque generated by the oscillation phenomena will appear as a column or a narrow band of columns in the spectrum around the characteristic frequency f_c of the oscillations as shown in Fig. 1. The amplitude of the column in the spectrum indicates to the control system the amplitude of oscillations of the rotor blades and thereby provides a basis for decisions on the wind turbine operation.

Axial tower oscillations, i.e. oscillations in the longitudinal direction of the main shaft, will create fluctuations in the apparent wind velocity and thereby also fluctuations in the rotor and generator shaft torques. Like rotor blade oscillations such fluctuations can be detected in the primary measurement data and in the secondary measurement data derived from the primary measurement data. By a spectrum analysis, the fluctuations will appear as a column or a narrow band of columns in the spectrum at the characteristic frequency f_0 as shown in Fig. 1. The amplitude of this column indicates the amplitude of the axial tower oscillations and thereby provides a basis for decisions on the wind turbine operation.

Depending on the type of the wind turbine and its equipment the control system according to the invention may operate in various ways. A first type of countermeasure seeks to attenuate the oscillation phenomena by changing the rotational speed of the rotor, while a second type seeks to change the oscillation phenomena by changing the dynamic load of the wind turbine.

For a wind turbine directly coupled to the mains, the first type of countermeasures comprises the application of brakes. Whether the brakes will be applied until standstill depends on the characteristics of the brake system used. Certain types of tip brakes

can only be reset at rotor standstill, so if such types are used, the rotor must be brought to a standstill before restart. However, if tip brakes can be reset during rotation, the control system can perform a restart "on the fly" of the wind turbine once the control system has detected that the oscillations have decayed.

5

Utilisation of a mechanical disk brake is possible in countermeasures of the first type, but such a utilisation is believed to lead to unacceptable wear of the brake. If the wind turbine is provided with an electrically controllable brake (retarder), this may advantageously be used in the control, always permitting a restart "on the fly". Finally, in

10 wind turbines of the active stall type the entire blade profile is used as a brake, and in a wind turbine of this type with a control system according to the present invention it is possible to restart "on the fly".

The second type of countermeasure wherein the control system counteracts by

15 changing the dynamic load may in stall controlled wind turbines with a fixed pitch angle comprise the control system introducing a yaw angle error until the oscillation phenomena disappear, whereupon the turbine resumes normal operation without yaw angle error.

20 The dynamic load can be changed in active stall wind turbines by changing the blade pitch angle in a negative direction until the oscillation phenomena disappear, whereupon the turbine resumes normal operation at the currently required pitch. For this type of turbine, the control system may also utilize introduction of a yaw angle error, if necessary.

25

CLAIMS

1. A method for measuring and controlling oscillations in a wind turbine coupled directly to a power mains, voltage and/or current being measured at the mains connection, and other values optionally being derived therefrom, such as apparent power, real power, reactive power, power factor, and $\cos(\phi)$, characterized by the steps of

- performing a spectrum analysis of one or more of the measured values or values derived therefrom,

- determining the amplitude of wind turbine oscillations based on the spectrum analysis and

- attenuating the oscillations by countermeasures performed by the wind turbine control system, if a determined amplitude of oscillations exceeds a predetermined value.

2. A method according to claim 1, further comprising the step of averaging a number of spectra from the spectrum analysis.

3. A method according to claim 1, wherein the oscillations, the amplitudes of which are determined, are rotor blade oscillations and/or axial tower oscillations.

4. A method according to claims 1, 2 or 3, wherein the step of attenuating comprises reducing the rotational speed of the rotor.

5. A method according to claim 4, wherein the step of attenuating comprises braking until standstill followed by restarting.

6. A method according to claim 4, wherein the step of attenuating comprises braking until the amplitude of the oscillations is reduced to less than a predetermined value.

7. A method according to claims 1, 2 or 3, wherein the step of attenuating comprises reducing the dynamic load.

8. A method according to claim 7, wherein the wind turbine is a stall controlled wind turbine with a fixed pitch angle, and the step of attenuating comprises subjecting a yaw angle error to the wind turbine until the oscillation amplitude has decayed below
5 a predetermined value whereupon the wind turbine resumes normal operation without yaw angle error.

9. A method according to claim 7, wherein the wind turbine is an active stall controlled wind turbine with a variable pitch angle, wherein the step of attenuating comprises changing the blade pitch angle in a negative direction until the oscillation amplitude has decayed below a predetermined value whereupon the wind turbine resumes
10 normal operation at the currently required pitch angle.

10. A method according to claim 9, wherein the step of attenuating further comprises
15 subjecting a yaw angle error to the wind turbine until the oscillation amplitude has been decayed below a predetermined value, whereupon the wind turbine resumes normal operation without yaw angle error.

SUMMARY

The invention relates to a method for measuring and controlling oscillations in a wind turbine wherein the wind turbine control system is adapted to determine the existence
5 and amplitude of vibrations of the wind turbine rotor blades and/or other structural vibrations on the basis of existing sensor/transducer signals.

The control system of the wind turbine is adapted to attenuate the oscillations before they reach an unacceptable level, and thereafter to cause the wind turbine to resume
10 normal operation.

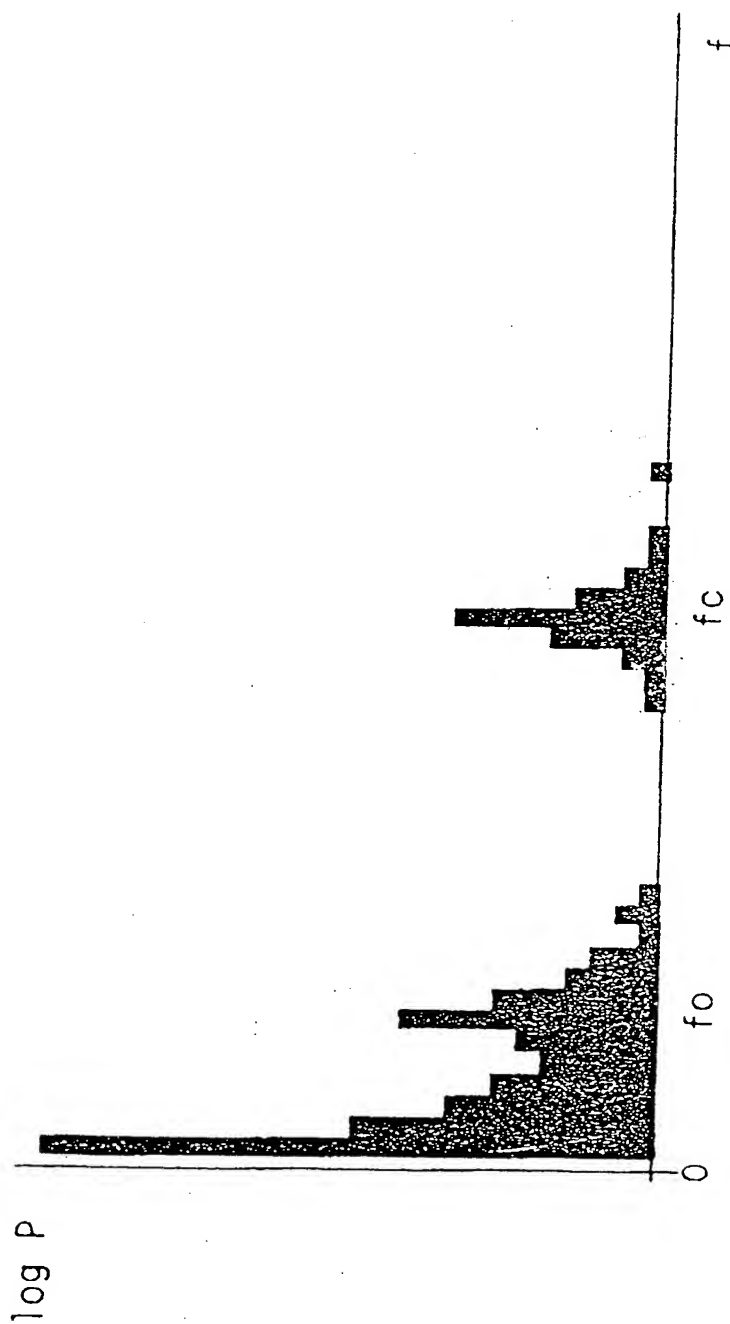


Figure 1/1

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/DK 99/00020

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F03D7/04 F03D11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F03D F01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 435 647 A (HARNER KERMIT I ET AL) 6 March 1984 see abstract see column 1, line 39 - line 45 see column 2, line 27 - line 43 ---	1
A	US 4 160 170 A (HARNER KERMIT I ET AL) 3 July 1979 see abstract see column 6, line 51 - line 57; figure 2 ---	1
A	US 5 140 856 A (LARSEN ORLA W) 25 August 1992 see column 8, line 65 - column 9, line 6 ---	1
A	GB 2 096 770 A (STANDARD TELEPHONES CABLES LTD) 20 October 1982 see abstract ---	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

*** Special categories of cited documents :**

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

20 May 1999

Date of mailing of the international search report

04/06/1999

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Criado Jimenez, F

INTERNATIONAL SEARCH REPORT

onal Application No

/DK 99/00020

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 614 676 A (DUTT WILLIAM R ET AL)</p> <p>25 March 1997</p> <p>see abstract; figures</p> <p>-----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent International Application No

PCT/DK 99/00020

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4435647	A	06-03-1984	AU 552913 B	26-06-1986
			BR 8301456 A	29-11-1983
			CA 1186393 A	30-04-1985
			DE 3308564 A	13-10-1983
			DK 136683 A	03-10-1983
			FI 831031 A	03-10-1983
			FR 2524570 A	07-10-1983
			GB 2117934 A,B	19-10-1983
			IN 158266 A	11-10-1986
			JP 58178885 A	19-10-1983
			NL 8301059 A	01-11-1983
			SE 8301552 A	03-10-1983
			ZA 8301632 A	30-11-1983

US 4160170	A	03-07-1979	CA 1120537 A	23-03-1982
			DE 2922972 A	03-01-1980
			DK 243579 A	16-12-1979
			FR 2428749 A	11-01-1980
			GB 2023237 A,B	28-12-1979
			SE 444599 B	21-04-1986
			SE 7905005 A	16-12-1979

US 5140856	A	25-08-1992	AU 9121791 A	25-06-1992
			WO 9209871 A	11-06-1992

GB 2096770	A	20-10-1982	SE 8202319 A	15-10-1982

US 5614676	A	25-03-1997	AU 1516197 A	11-09-1997
			BR 9701140 A	22-09-1998
			CA 2176992 A	09-09-1997
			CZ 9700692 A	14-01-1998
			EP 0794420 A	10-09-1997
			HU 9700559 A	29-12-1997
			JP 10010015 A	16-01-1998
			PL 318751 A	15-09-1997
